

ScrubberGuard

Measuring system for monitoring wash water of exhaust gas cleaning systems



Applications

- Monitoring wash water of exhaust gas cleaning systems

Industries

- Shipping industry


Advantages

- True non-contact free-fall measurement of turbidity and PAH (polycyclic aromatic hydrocarbons) guarantees consistent true measurement values
- Calibration with secondary standard possible at any time
- Extremely low maintenance
- Compact and certified all-in-one system
- Central, integrated control unit with colour touch-screen
- Display of values and / or graphs with visualization of the measured data covering the past 32 days.

ScrubberGuard

Measuring system for monitoring wash water of exhaust gas cleaning systems

Innovations with tangible benefits

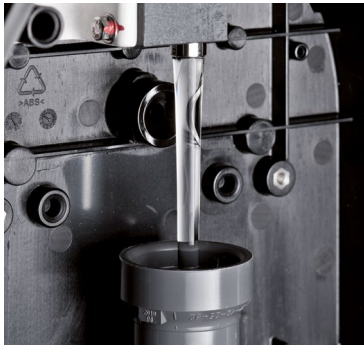

No window fouling as a result of the non-contact free-fall measurement

The AquaScat and the OilGuard measure turbidity or the PAH content, respectively, in a free-fall water stream. There is no contact between the water and the optics.

- No reading falsifications as a result of window fouling
- The true measurements are always guaranteed
- Extremely low maintenance



Re-calibration with secondary standard

At SigrisT, the AquaScat is calibrated with formazine, the OilGuard with phenanthrene. For recalibration at the customer, a secondary standard (solid standard) is available.

- Exact re-calibration without formazine/phenanthrene
- No chemicals necessary
- Low total cost of ownership




Compact all-in-one system

- Simple installation, only the rack has to be mounted at the floor and power / water be connected
- Multitude of communication options

Modular design

- For a simple integration and adaptation to individual operation conditions.

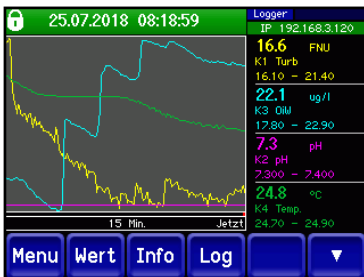

Integrated control unit

The instrument is operated via a touch screen with colour display.

- Values, graphs, states or alarms can be displayed, as selected.
- An internal data logger allows the visualisation of the measured data covering the past 32 days.
- Extensive communication options incl. integrated web server

Technical data

ScrubberGuard System

Dimensions:	approx. 1280x880x400mm (h/w/d)
Sample temperature:	0..+50°C
Sample flow:	min. 4l/min
Max. pressure:	0.4 Mpa (4 bar)
Max. ambient temperature:	+50°C
Ambient humidity:	0.. 100% rel.h.
Protection:	min. IP 54
Power supply:	215..240VAC, 47 .. 53 Hz
Power consumption:	500W (900W incl. inlet pump)
List:	Reliable measurement up to 20°, measurement possible up to 30° (all axes)
Weight:	approx. 100 kg

Materials

Structure:	St 1.0038, powder coated
In contact with medium:	316L, 1.4301, PVC-U (+GF+), FKM
Pumphead:	316L; Viton® and PPE
Impeller:	Viton®

Operation and interfaces

Display:	1/4 VGA, 3.5"
Operation:	Touchscreen
Outputs:	4 x 0/4.. 20mA 4 x digital outputs 2 x relays 250 VAC 4A freely configurable
Inputs:	2 x 0/4..20mA 4 x digital inputs freely configurable
Digital interfaces:	Ethernet, Modbus TCP, microSD card
Optional:	Profibus DP, Modbus RTU, HART, Profinet IO

Connection dimensions

Electr. conn. dim.:	0.25-4mm ² , AWG 22-12
Hydr. connection:	R1"

Turbidity measurement

Measuring principle:	90° scattered light acc. to standard ISO7027/EN27027
Measured value:	FNU
Measuring range:	0...1000 FNU

Oil-in-water measurement

Measuring principle:	UV fluorescence acc. to MEPC.259(68)
Measured value:	Phenanthrene equivalent
Measuring range:	0-1000 µg/l phenanthrene equivalent

pH/temperature sensor

Measuring principle pH:	Glas electrode
Measured pH:	pH
Measuring range pH:	0-14 pH
Meas. principle:	NTC 22 kΩ
Measured temperature:	°C, K, °F
Meas. range temperature:	0 - 130°C



photometer.com/869e

Applied Process Technology

Galileilaan 33J | 6716 BP Ede
Postbus 234 | 6710 BE Ede
T. +31 88 278 28 28
info@apt.nl | www.apt.nl

SIGRIST
PROCESS-PHOTOMETER
SIGRIST-PHOTOMETER AG
Hofurlstrasse 1 · CH-6373 Ennetbürgen
Tel. +41 41 624 54 54 · Fax +41 41 624 54 55
www.photometer.com · info@photometer.com